

Series 5 WB Taps & Splitter

WT52-10WB | WT52-20WB | WS52-05WB



Quattro and Wideband Compatible


- High Isolation
- Inbuilt LTE filter
- 4 Years Warranty
- Features Trunk EQ
- LED power indicator
- Quattro and WB Compatible
- Colour coded inputs and outputs
- Tap outputs on side for easy push fit
- Auxiliary 18V Input injects power to all SAT lines

A range of passive, 5 wire WB and Quattro compatible Taps and Splitters. The Whyte Series 5 WB range of Taps are available in 1-way and 2-way with 10dB or 20dB Tap attenuation as well as a 2-way Splitter.

The Series 5 WB Taps and Splitter can be directly connected to Series 5 and Series D dSCR Multiswitches using the supplied push fit connectors which reduces installation time.

The Whyte Series 5 WB Taps and Splitter feature our intelligent trunk equalisation technology Trunk EQ for flat trunk output.

This industry first enables longer cascades to be created for Quattro or Wideband IRS distribution systems.

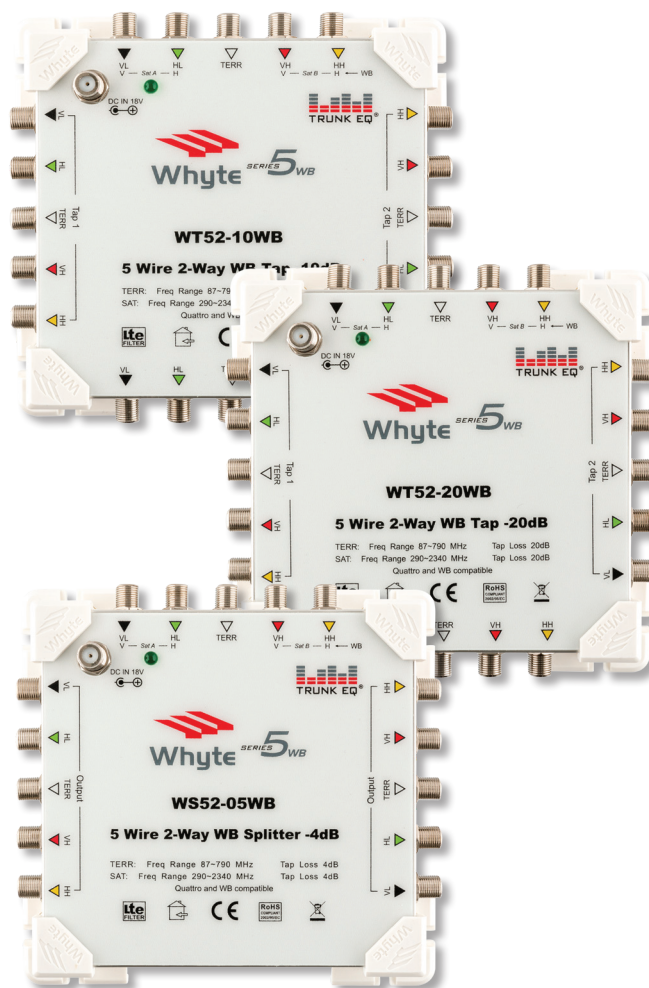

MODEL		WT52-10WB	WT52-20WB	WS52-05WB
Frequency	SAT	290 - 2340MHz	290 - 2340MHz	290 - 2340MHz
	TERR	87 - 790MHz	87 - 790MHz	87 - 790MHz
Inputs (F-Type Connector)		4 SAT + 1 TERR	4 SAT + 1 TERR	4 SAT + 1 TERR
Outputs (F-Type Connector)		3x 4 SAT + 3x TERR	3x 4 SAT + 3x TERR	2x 4 SAT + 2x TERR
DC Input (Injection of DC applied to)		All SAT Trunks & Tap	All SAT Trunks & Tap	All SAT Trunks & Tap
DC Pass Trunk to Tap	SAT	YES	YES	YES
	TERR	NO	NO	NO
DC Pass Trunk to Trunk	SAT	YES	YES	~
	TERR	NO	NO	~
Trunk Through Loss	SAT	2dB ±1dB	2dB ±1dB	~
	TERR	2dB ±1dB	2dB ±1dB	~
Tap Loss	SAT	10dB	20dB	4dB ±1dB
	TERR	10dB	20dB	4dB ±1dB
Fixed Slope Taps		YES	YES	YES
Trunk EQ		YES	YES	YES
Isolation		>30dB	>30dB	>30db
Max Current Pass (Trunk/Trunk Trunk/Tap)		2A	2A	2A
Power Indication		LED	LED	LED
Dimensions W x L x H (mm)		156 x 150 x 43	156 x 150 x 43	156 x 150 x 43
Weight		396g	396g	364g